



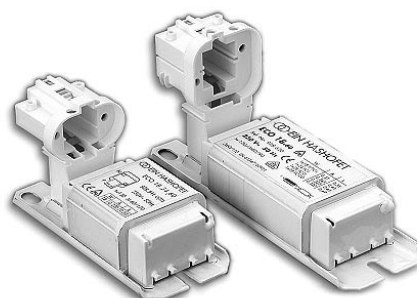


Electromagnetic Ballasts for CFL Lamps - With Lamp Holders




For lamp types TC-S, TC-D
 Push-in terminals 0.5 - 1.5 mm²
 tw 130
 Protection group I
 Acc. to EN 61347/60921



Ballasts for TC-S lamps



Ballasts for TC-D lamps

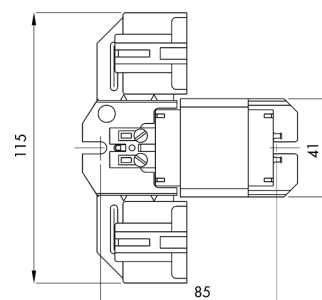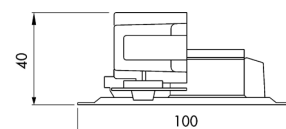

Ballasts for two TC-D lamps (Gemini)

(Ballasts for 230V)

Lamp			Ballast								Capacitor (Cp)	
Rated Power W	Type	Rated Current A	Type	Ref. No.	V, Hz	$\Delta T / \Delta T_{ab}$ (IEC) °C	Weight Kg	Dimensions			EEI	μF±10% / V
								a mm	b mm	c mm		
5	TC-S	0.180	L 7/9/11.511	928.511	230, 50	50/75	0.32	100	85	34	-	2 / 250
7	TC-S	0.175	L 7/9/11.511	928.511	230, 50	50/75	0.32	100	85	34	-	2 / 250
9	TC-S	0.170	L 7/9/11.511	928.511	230, 50	50/75	0.32	100	85	34	-	2 / 250
11	TC-S	0.155	L 7/9/11.511	928.511	230, 50	50/75	0.32	100	85	34	-	2 / 250
18	TC-D	0.220	L 18.541	928.541	230, 50	60/145	0.51	155	137	60	-	2.5 / 250
26	TC-D	0.325	L 26.626	928.626	230, 50	70/105	0.51	155	137	60	-	4 / 250
10	TC-D	0.190	L 13.521	928.521	230, 50	60/85	0.32	100	85	34	-	2 / 250
13	TC-D	0.175	L 13.521	928.521	230, 50	60/85	0.32	100	85	34	-	2 / 250
2x9	TC-D	0.170	L 13.625 (Gemini)	928.625	230, 50	60/85	0.32	100	85	34	-	2 / 250

Screw terminals are available on request.
 Other types are available on request.