



Superposed Pulse Ignitors 220-250V / 50-60Hz

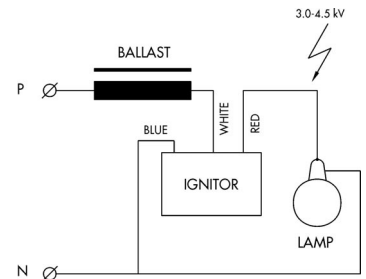

For HPS and Metal Halide Lamps
 Approved by the Standards Institution of Israel
 Compatible to VDE and IEC
 Transient proof
 Protect the ballast from the pulse voltage
 Potted in polyurethane resin
 Long life
 Acc. to EN 61347 / 60927

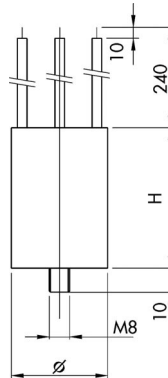

Type	Ref. No.	Pulse Peak Volt.	Pulses Per 1/2. Cycle	Pulses Position (Positive Half)	Max. Load Cap.	Respon Volt.	Discon. Volt.	Max Rate Curr.	Losses	ΔT	Max. Amb. Temp.	Height (H)	Dia. ϕ	Lamps	
														HPS W	MH W
ES-2	702	3.5-4.5	≥ 3	60-90	100	185	175	2.0	2.5	45	85	70	35	50-150	35-150
ES-250	703	3.5-4.5	≥ 3	60-90	100	185	175	3.0	3.0	45	85	70	35	100-250	70-250
ES-400	704	3.5-4.5	≥ 3	60-90	100	185	175	4.6	3.5	45	85	93	40	50-400	70-400