

220-240V
50/60 HzIK
10IP
66

Stylized park luminaire, based on the architecture of AVENIDA LED luminaires and referring in character to classic decorative luminaires.

TECHNICAL DATA

Mounting: on pillar $\varnothing 60/76$ mm, with mounting bracket (included), suspended on a mounting tube with diameter $\varnothing 42$, catenary, on a $\varnothing 6-15$ mm diameter cable

Body: high pressure die-cast aluminum

Lateral Surface Wind Exposed: 0,111 m²

Colour: graphite, gray

Diffuser: polycarbonate

ELECTRICAL DATA

Power supply efficiency: >89%

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED

Electrical connection: luminaire equipped with 2x1,5 mm² wire with a length of 6 m (II class), luminaire equipped with 2x1,5 mm² wire with a length of 7 m, luminaire equipped with 2x1,5 mm² wire with a length of 80 cm

OPTICAL DATA

Light distribution: omnidirectional, symmetrical-elliptic, symmetrical-elliptic, omnidirectional

Way of lighting: direct

Type of optic: diffuser, 018 - for pedestrian zones, 019 - for recreational areas, 020 - for parks and parking lots, 021 - for bike paths, 022 - for pedestrian zones, 023 - for recreational areas, 024 - for parks and parking lots, 025 - for bike paths, 032 - for pedestrian zones, 033 - for recreational areas, 034 - for parks and parking lots, 035 - for bike paths, 036 - for pedestrian zones, 037 - for recreational areas, 038 - for parks and parking lots, 039 - for bike paths

ULOR / DLOR: 2,5/97,5, 2,6/97,4, 2,7/97,3

GENERAL DATA

Available on request: DALI, 10kV surge protection, NTC

Other remarks: the pole is not part of the luminaire

Warranty: 5 years

Application: avenues, sidewalks, parks, residential, public spaces, Railway stations, facades, promenade, roads, residential area roads



Code	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Operating temperature range [°C]	LED lifetime [h]
Type: AVENIDA HERITAGE LED P							
13032X.5L012.011	19	2350	124	3000	>80	-40 ... +55	(L80B10) 100 000
13032X.5L022.011	19	2500	132	4000	>80	-40 ... +55	(L80B10) 100 000
13032X.5L042.011	27	3350	124	3000	>80	-40 ... +55	(L80B10) 100 000
13032X.5L052.011	27	3500	130	4000	>80	-40 ... +55	(L80B10) 100 000
13032X.5L072.011	34	4250	125	3000	>80	-40 ... +50	(L80B10) 100 000
13032X.5L082.011	34	4400	129	4000	>80	-40 ... +50	(L80B10) 100 000
Type: AVENIDA HERITAGE LED S							
13032X.5L012.012	19	2350	124	3000	>80	-40 ... +55	(L80B10) 100 000
13032X.5L022.012	19	2500	132	4000	>80	-40 ... +55	(L80B10) 100 000
13032X.5L042.012	27	3350	124	3000	>80	-40 ... +55	(L80B10) 100 000
13032X.5L052.012	27	3500	130	4000	>80	-40 ... +55	(L80B10) 100 000
13032X.5L072.012	34	4250	125	3000	>80	-40 ... +50	(L80B10) 100 000
13032X.5L082.012	34	4400	129	4000	>80	-40 ... +50	(L80B10) 100 000
Type: AVENIDA HERITAGE LED C							
13032X.5L012.013	19	2350	124	3000	>80	-40 ... +55	(L80B10) 100 000
13032X.5L022.013	19	2500	132	4000	>80	-40 ... +55	(L80B10) 100 000

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Code	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Operating temperature range [°C]	LED lifetime [h]
Type: AVENIDA HERITAGE LED C							
13032X.5L042.013	27	3350	124	3000	>80	-40 ... +55	(L80B10) 100 000
13032X.5L052.013	27	3500	130	4000	>80	-40 ... +55	(L80B10) 100 000
13032X.5L072.013	34	4250	125	3000	>80	-40 ... +50	(L80B10) 100 000
13032X.5L082.013	34	4400	129	4000	>80	-40 ... +50	(L80B10) 100 000
Type: AVENIDA HERITAGE LENS LED P - O18, O19, O20, O21 optics							
13033X.5L012.XX1	18	2200	122	3000	>70	-40 ... +55	(L90B10) 100 000
13033X.5L022.XX1	18	2300	128	4000	>70	-40 ... +55	(L90B10) 100 000
13033X.5L042.XX1	25	3000	120	3000	>70	-40 ... +55	(L90B10) 100 000
13033X.5L052.XX1	25	3200	128	4000	>70	-40 ... +55	(L90B10) 100 000
13033X.5L072.XX1	35	4000	114	3000	>70	-40 ... +50	(L90B10) 100 000
13033X.5L082.XX1	35	4200	120	4000	>70	-40 ... +50	(L90B10) 100 000
Type: AVENIDA HERITAGE LENS LED P - O22, O23, O24, O25 optics							
13033X.5L102.XX1	35	4450	127	3000	>70	-40 ... +50	(L90B10) 100 000
13033X.5L112.XX1	35	4600	131	4000	>70	-40 ... +50	(L90B10) 100 000
13033X.5L132.XX1	49	6050	123	3000	>70	-40 ... +45	(L90B10) 100 000
13033X.5L142.XX1	49	6350	130	4000	>70	-40 ... +45	(L90B10) 100 000
Type: AVENIDA HERITAGE LENS LED S - O32, O33, O34, O35 optics							
13033X.5L012.XX2	19	2450	129	3000	>70	-40 ... +55	(L90B10) 100 000
13033X.5L022.XX2	19	2600	137	4000	>70	-40 ... +55	(L90B10) 100 000
13033X.5L042.XX2	26	3350	129	3000	>70	-40 ... +55	(L90B10) 100 000
13033X.5L052.XX2	26	3550	137	4000	>70	-40 ... +55	(L90B10) 100 000
13033X.5L072.XX2	36	4400	122	3000	>70	-40 ... +50	(L90B10) 100 000
13033X.5L082.XX2	36	4700	131	4000	>70	-40 ... +50	(L90B10) 100 000
Type: AVENIDA HERITAGE LENS LED S - O36, O37, O38, O39 optics							
13033X.5L102.XX2	35	4900	140	3000	>70	-40 ... +50	(L90B10) 100 000
13033X.5L112.XX2	35	5250	150	4000	>70	-40 ... +50	(L90B10) 100 000
13033X.5L132.XX2	49	6600	135	3000	>70	-40 ... +45	(L90B10) 100 000
13033X.5L142.XX2	49	7050	144	4000	>70	-40 ... +45	(L90B10) 100 000
Type: AVENIDA HERITAGE LENS LED C - O32, O33, O34, O35 optics							
13033X.5L012.XX3	19	2450	129	3000	>70	-40 ... +55	(L90B10) 100 000
13033X.5L022.XX3	19	2600	137	4000	>70	-40 ... +55	(L90B10) 100 000
13033X.5L042.XX3	26	3350	129	3000	>70	-40 ... +55	(L90B10) 100 000
13033X.5L052.XX3	26	3550	137	4000	>70	-40 ... +55	(L90B10) 100 000
13033X.5L072.XX3	36	4400	122	3000	>70	-40 ... +50	(L90B10) 100 000
13033X.5L082.XX3	36	4700	131	4000	>70	-40 ... +50	(L90B10) 100 000
Type: AVENIDA HERITAGE LENS LED C - O36, O37, O38, O39 optics							
13033X.5L102.XX3	35	4900	140	3000	>70	-40 ... +50	(L90B10) 100 000
13033X.5L112.XX3	35	5250	150	4000	>70	-40 ... +50	(L90B10) 100 000
13033X.5L132.XX3	49	6600	135	3000	>70	-40 ... +45	(L90B10) 100 000
13033X.5L142.XX3	49	7050	144	4000	>70	-40 ... +45	(L90B10) 100 000

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

13033 □ .5L012. □ 1


Type of optic

- 01 O18 - for pedestrian zones
- 02 O19 - for recreational areas
- 03 O20 - for parks and parking lots
- 04 O21 - for bike paths
- 05 O22 - for pedestrian zones
- 06 O23 - for recreational areas
- 07 O24 - for parks and parking lots
- 08 O25 - for bike paths
- 15 O32 - for pedestrian zones
- 16 O33 - for recreational areas
- 17 O34 - for parks and parking lots
- 18 O35 - for bike paths
- 19 O36 - for pedestrian zones
- 20 O37 - for recreational areas
- 21 O38 - for parks and parking lots
- 22 O39 - for bike paths

Colour

- 2 gray
- 5 graphite

Code	Dimensions [mm] L H	Mounting dimensions [mm] ØS	Pallet quantity	Quantity in package	Net weight [kg]
Type: AVENIDA HERITAGE LED P					
13032X.5L012.011	561 570	76	12	1	6.2
13032X.5L022.011	561 570	76	12	1	6.2
13032X.5L042.011	561 570	76	12	1	6.2
13032X.5L052.011	561 570	76	12	1	6.2
13032X.5L072.011	561 570	76	12	1	6.2
13032X.5L082.011	561 570	76	12	1	6.2
Type: AVENIDA HERITAGE LED S					
13032X.5L012.012	561 426	42	12	1	4.9
13032X.5L022.012	561 426	42	12	1	4.9
13032X.5L042.012	561 426	42	12	1	4.9
13032X.5L052.012	561 426	42	12	1	4.9
13032X.5L072.012	561 426	42	12	1	4.9
13032X.5L082.012	561 426	42	12	1	4.9
Type: AVENIDA HERITAGE LED C					
13032X.5L012.013	561 536	76	12	1	6.7
13032X.5L022.013	561 536	76	12	1	6.7
13032X.5L042.013	561 536	76	12	1	6.7
13032X.5L052.013	561 536	76	12	1	6.7
13032X.5L072.013	561 536	76	12	1	6.7
13032X.5L082.013	561 536	76	12	1	6.7
Type: AVENIDA HERITAGE LENS LED P - O18, O19, O20, O21 optics					
13033X.5L012.XX1	561 570	76	12	1	6.2
13033X.5L022.XX1	561 570	76	12	1	6.2
13033X.5L042.XX1	561 570	76	12	1	6.2
13033X.5L052.XX1	561 570	76	12	1	6.2
13033X.5L072.XX1	561 570	76	12	1	6.2
13033X.5L082.XX1	561 570	76	12	1	6.2
Type: AVENIDA HERITAGE LENS LED P - O22, O23, O24, O25 optics					
13033X.5L102.XX1	561 570	76	12	1	6.2
13033X.5L112.XX1	561 570	76	12	1	6.2
13033X.5L132.XX1	561 570	76	12	1	6.2



Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for $T_a=25^{\circ}\text{C}$.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Code	Dimensions [mm] LH	Mounting dimensions [mm] ØS	Pallet quantity	Quantity in package	Net weight [kg]
Type: AVENIDA HERITAGE LENS LED P - O22, O23, O24, O25 optics					
13033X.5L142.XX1	561 570	76	12	1	6.2
Type: AVENIDA HERITAGE LENS LED S - O32, O33, O34, O35 optics					
13033X.5L012.XX2	561 426	42	12	1	4.9
13033X.5L022.XX2	561 426	42	12	1	4.9
13033X.5L042.XX2	561 426	42	12	1	4.9
13033X.5L052.XX2	561 426	42	12	1	4.9
13033X.5L072.XX2	561 426	42	12	1	4.9
13033X.5L082.XX2	561 426	42	12	1	4.9
Type: AVENIDA HERITAGE LENS LED S - O36, O37, O38, O39 optics					
13033X.5L102.XX2	561 426	42	12	1	4.9
13033X.5L112.XX2	561 426	42	12	1	4.9
13033X.5L132.XX2	561 426	42	12	1	4.9
13033X.5L142.XX2	561 426	42	12	1	4.9
Type: AVENIDA HERITAGE LENS LED C - O32, O33, O34, O35 optics					
13033X.5L012.XX3	561 536	42	12	1	6.7
13033X.5L022.XX3	561 536	76	12	1	6.7
13033X.5L042.XX3	561 536	76	12	1	6.7
13033X.5L052.XX3	561 536	76	12	1	6.7
13033X.5L072.XX3	561 536	42	12	1	6.7
13033X.5L082.XX3	561 536	76	12	1	6.7
Type: AVENIDA HERITAGE LENS LED C - O36, O37, O38, O39 optics					
13033X.5L102.XX3	561 536	76	12	1	6.7
13033X.5L112.XX3	561 536	76	12	1	6.7
13033X.5L132.XX3	561 536	76	12	1	6.7
13033X.5L142.XX3	561 536	42	12	1	6.7

OTHER PICTURES



AVENIDA Heritage LED S



AVENIDA Heritage LED C

ACCESSORIES



■ 150175.00982
□ 150172.00966

Cover masking ø60 mm



150170.01022

AVENIDA HERITAGE LED C/AVENIDA HERITAGE LENS LED C - 2 field connectors IP68

150170.01024

AVENIDA HERITAGE LED C/AVENIDA HERITAGE LENS LED C - 4 field connectors IP68

LIGHT BEAM CURVES

130322.5L012.011

130332.5L012.011

130332.5L012.021

130332.5L012.031

130332.5L012.041

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.


Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com


Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

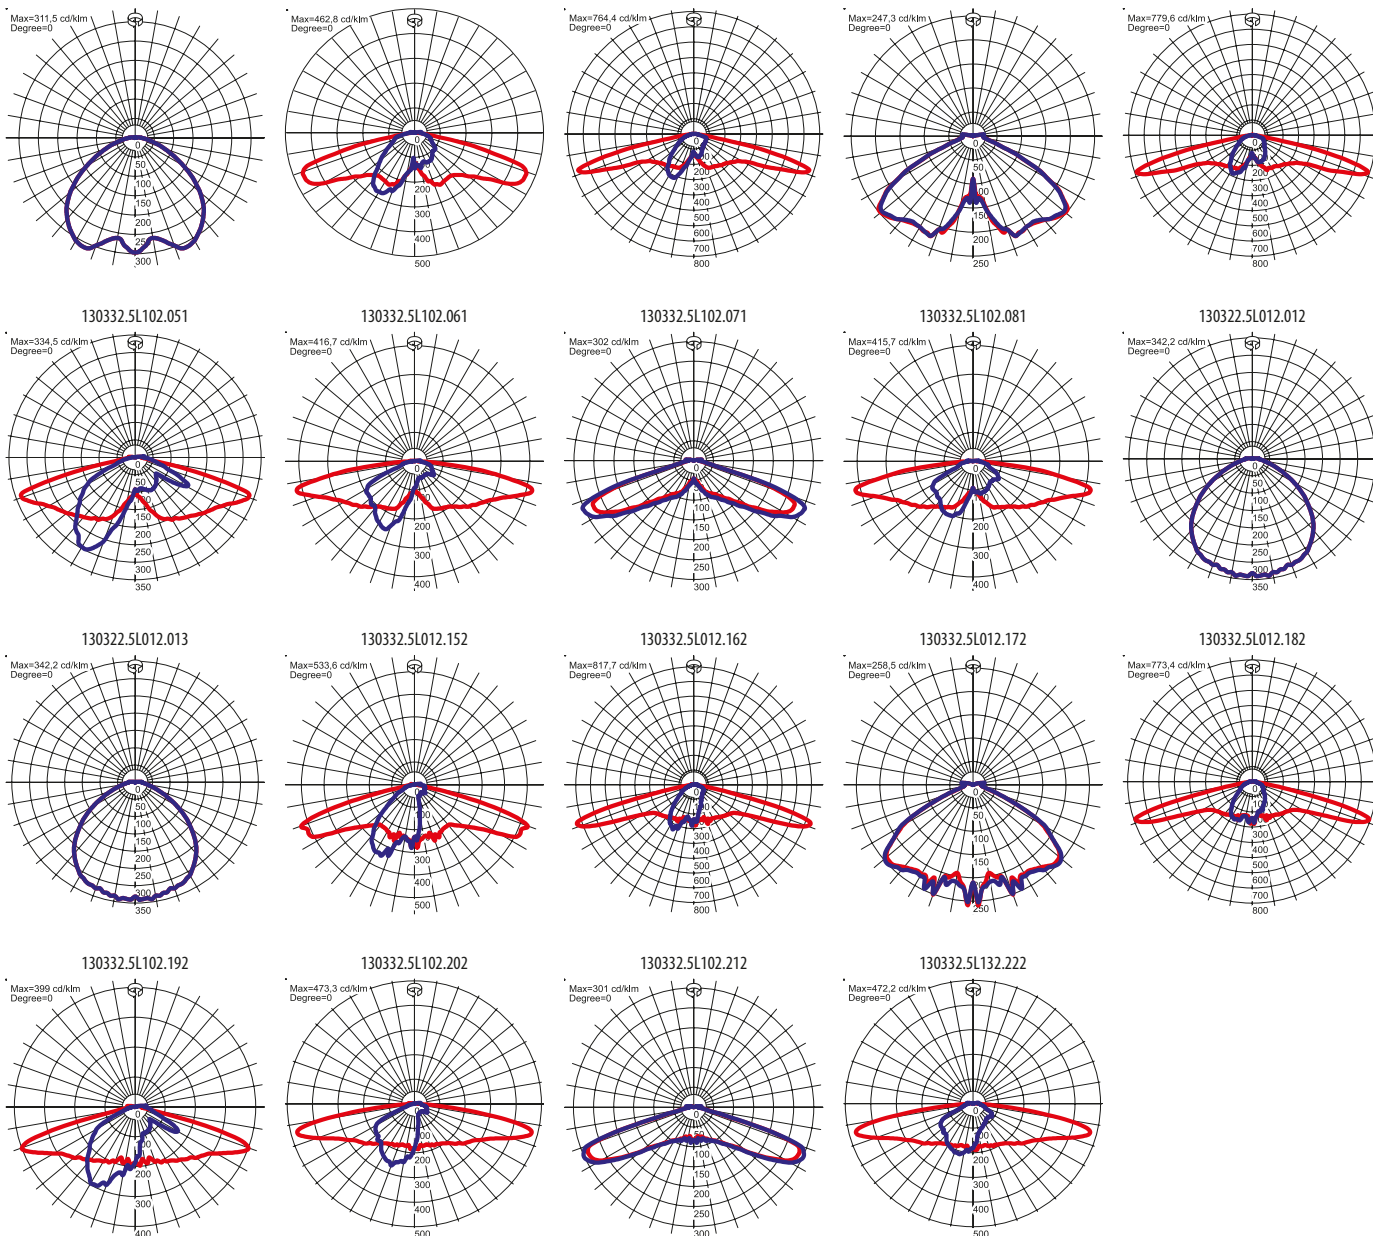


WAY OF LIGHTING

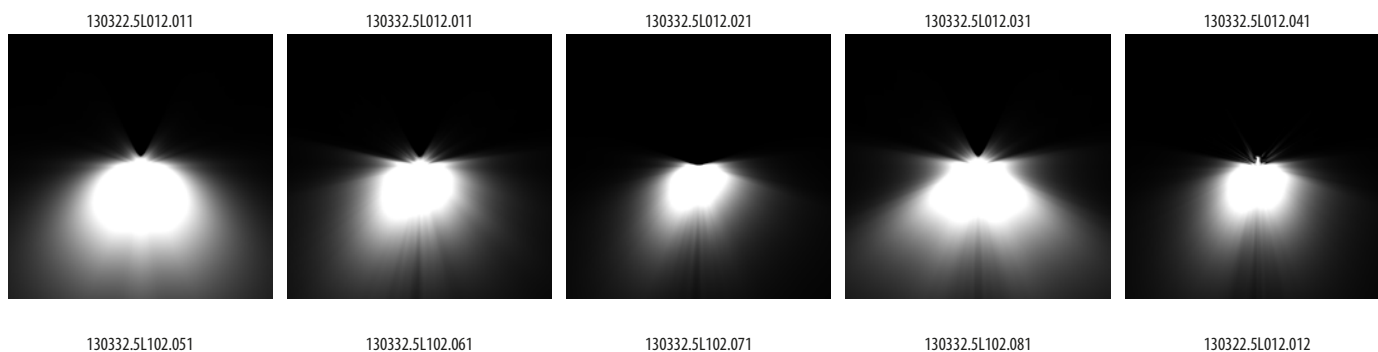


Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com
Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.
The parameters in the data sheet are given for $T_a=25^{\circ}C$.
The operating temperature ranges apply only to luminaires used in the outdoor environment.



130322.5L012.013




130332.5L012.152




130332.5L012.162



130332.5L012.172




130332.5L012.182




130332.5L102.192




130332.5L102.202



130332.5L102.212



130332.5L132.222



Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for $T_a=25^{\circ}\text{C}$.

The operating temperature ranges apply only to luminaires used in the outdoor environment.